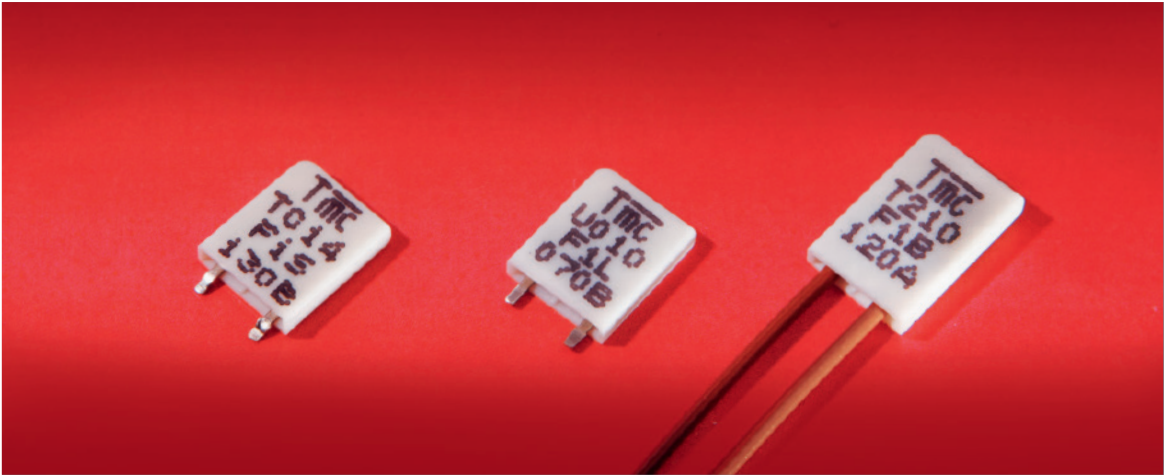


Temperature limiter
for signal currents
up to 250 mA
automatic reset



F series

Technical specifications | TMC F series
Version 2.1 EN 2025
Copyright by TMC Sensortechnik GmbH



Description

The extremely flat temperature protectors of the F series are miniature bimetal switches with a wide range of applications in the temperature sensor technology. Because of their dimensions they are ideal for temperature monitoring in very confined spaces. Among other applications they are used in electronic components and help to further miniaturise devices. Both signal currents and currents up to 250 mA are controlled reliably. The contacts open in a snap action when reaching the cut off temperature and close again automatically when the temperature decreases to the reset temperature. Numerous customizations extend the spectrum of applications.

Customer specific solutions

Our creative R&D team turns your ideas into innovative products. Please contact us.

Extremely flat design

by intelligent construction and most precise production

Very compact construction

by wire ports integrated into the housing

Thermally solid connections

by welded wire connections

Constant dimensions

by front side mounted wires for all wire cross sections

PCB application

by integrated THT and SMD terminals

Position-independent use

by symmetrical design

Constant resistance

by optimal contact material, high contact pressure and sliding contacting

Consistent high quality level

by automated production with integrated monitoring



TMC product range overview

Temperature limiter:

Product design	Feature	Application	Series
	automatic reset	up to 250 mA	F
	automatic reset	up to 6,3 A	C
	selfhold	up to 10 A	R
	automatic reset	up to 12 A	H

Temperature sensors:

Product design	Version	Features	Series
	PTC	sudden change of resistance	M
	Pt100 / Pt1000 NTC	consistent dimensions	S
	Platinum sensor	extremely precise	PT

Imprint

TMC Sensortechnik GmbH, Westliche Gewerbestraße 3, D-75015 Bretten
Phone +49 (0) 72 52/9431 - 0, Fax +49 (0) 72 52/9431 - 31, www.tmc.eu

Authorized to represent: Dr. Heino Freudenberg
Companies register: HRB240551
VAT ID: DE174308309
Tax No: 30045/35304

Subject to change without notice. Errors and omissions excepted. No liability for improper use of the products or violation of third-party rights. With publication of this data sheet all previous versions are invalid.
Edition 07/25



Temperature limiter

F series

Technical specifications

TMC
A001
F1B
150B

- Manufacturer

- Batch number

- Type F1, version B

- Nominal switching temperature 150 °C



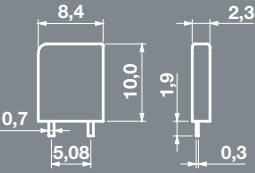
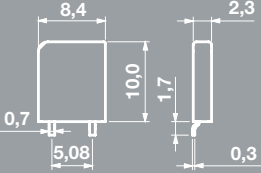
Tolerance class B

Specifications

Type	F1	FX (in preparation)
Contact version	Normally closed (nc), snap action	Normally closed (nc), snap action
Switching cycles	10.000 cycles	10.000 cycles
AC cos φ = 1,0	250 mA/250 V	1 A/250 V
DC resistive	400 mA/48 V*	1 A/48 V*
Nominal switching temperature (NST)	in 5 K steps	in 5 K steps
Standard	60 °C ... 160 °C**	60 °C ... 160 °C**
Approved	60 °C ... 160 °C	60 °C ... 160 °C
NST tolerance	± 5 K (code letter B)**	± 5 K (code letter B)**
Reset temperature (RST)	40 K ± 15 K below NST (> 35 °C)	40 K ± 15 K below NST (> 35 °C)
Resistance	< 50 mΩ	< 50 mΩ
Contact bouncing time	< 1 ms	< 1 ms
Dielectric strength	2 kV	2 kV
Ambient temperature	T180	T180
Protection level	IP00**	IP00**
Protection class	Suitable for use in devices of class I & II	Suitable for use in devices of class I & II
Principle of operation at degree of contamination	Type B: clean Type C: normal	Type B: clean Type C: normal

* TMC measurement ** different values on request

Versions

Version W	Version B	Version L	Version S
Switch not insulated	Switch insulated	Switch not insulated	Switch not insulated
			
Leads: stranded, solid	Leads: stranded, solid	Connectors: Pin	Connectors: SMD

Dimensions in mm.

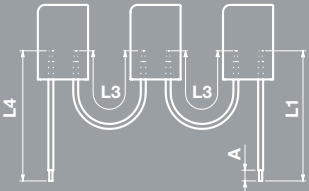
Wires

Standard	
Type (insulation) up to 150 °C:	ISO F
over 155 °C:	ISO H
Length	100 mm / 300 mm
Stripped length	5 mm
Cross section	0,14 mm²
Operating voltage	300 V

Alternative or UL listed wires on request.

Example

Triplet version B




Approvals

Institute	Standard	Number
VDE	EN60730	40031452
UL	UL60730	E326354
CQC	GB14536	CQC24002456447

Ordering example for standard

F1B - 150B - 100/100



Wire length (100 mm/100 mm)
Tolerance (B = ± 5 K)
Nominal switching temperature (150 °C)
Version (B = Switch insulated)
F series, type F1

Please contact us for customer specific solutions.

My notes